



VERIFICATION

I, Kazuhira Watanabe

of 3rd Floor No.8 Kikuboshi Tower Building, 20-18 Asakusabashi 3-chome,
Taito-ku, Tokyo, JAPAN 111-0053

do hereby verify that I am fully conversant with the Japanese and English languages and that attached translation signed by me is, to the best of my knowledge and belief, a true and correct English translation of the Japanese Patent Application No. 2003-321914.

DATED July 21, 2009

SIGNED 

PATENT OFFICE
JAPANESE GOVERNMENT

This is to certify that the annexed is a true copy
of the following application as filed with this office.

Date of Application: September 12, 2003

Application Number: 2003-321914

Applicant(s): NGK Insulators, Ltd.

Commissioner,
Japan Patent Office

[NAME OF DOCUMENT] APPLICATION FOR PATENT

[SERIAL NUMBER] WP04496

[FILING DATE] September 12, 2003

[ADDRESSEE] Yasuo Imai

Commissioner of the Patent Office

[INTERNATIONAL PATENT CLASSIFICATION] B01J 35/04

B01D 46/00 302

[INVENTOR]

[Address or Residence] c/o NGK Insulators, Ltd.
2-56, Suda-cho, Mizuho-ku,
Nagoya-city, Aichi-prefecture

[Name] Yukihiro ICHIKAWA

[INVENTOR]

[Address or Residence] c/o NGK Insulators, Ltd.
2-56, Suda-cho, Mizuho-ku,
Nagoya-city, Aichi-prefecture

[Name] Sadaaki HIRAI

[APPLICANT FOR PATENT]

[Identification number] 000004064

[Name] NGK Insulators, Ltd.

[AGENT]

[Identification number] 100088616

[Patent attorney]

[Name] Kazuhira Watanabe

[OFFICIAL FEE]

[Payment registered number] 009689

[Amount of payment] ¥21,000

[LIST OF SUBMITTED DOCUMENTS]

[Name of document] Scope of the Claim for Patent : 1

[Name of document] Specification : 1

[Name of document] Drawings : 1

[Name of document] Abstract : 1

[General power of attorney number] 9001231

[Name of Document] Scope of the Claim for Patent

[Claim 1] A honeycomb structure comprising:

a honeycomb structural part, which has partition walls for forming a plurality of cells partitioned in a honeycomb shape
5 and for forming recesses on an outer peripheral surface, and

an outer wall part disposed on the outer peripheral surface of the honeycomb structural part,

wherein voids are formed in the recesses between the outer wall part and the honeycomb structural part.

10 [Claim 2] The honeycomb structure according to claim 1, wherein, in the recesses, the average contact ratio of the outer wall part and the honeycomb structural part is 0.9 or less.

[Claim 3] The honeycomb structure according to claim 1 or 2, wherein the honeycomb structural part mainly comprises a ceramic material or a metal material, and the outer wall part
15 mainly comprises a ceramic material.

[Claim 4] The honeycomb structure according to any one of claims 1 to 3, wherein an interface exists in the boundary between the outer wall part and the honeycomb structural part.

20 [Claim 5] The honeycomb structure according to any one of claims 1 to 4, wherein the honeycomb structural part contains a material having an absorption function and/or a catalyst function.

[Claim 6] The honeycomb structure according to any one of
25 claims 1 to 5, wherein at least a part of the cells is plugged at edges and used as a filter.

[Claim 7] The honeycomb structure according to any one of

claims 1 to 6, wherein catalysts are carried in the cells and/or in the partition walls.

[Claim 8] The honeycomb structure according to claim 7, wherein the catalysts have a function for purifying auto exhaust gas.

[Claim 9] A method of manufacturing a honeycomb structure comprising:

a step of obtaining a formed body by forming which has partition walls for forming a plurality of cells partitioned

in a honeycomb shape;

a step of drying the formed body;

a step of obtaining a fired body by firing the formed body;

and

a step of forming an outer wall part by disposing a coating material on the outer peripheral surface of the formed body or the fired body,

wherein the coating material is disposed so as to form voids in at least a part between the outer peripheral surface and the outer wall part at the step of forming the outer wall part.

[Claim 10] The method of manufacturing a honeycomb structure according to claim 9, comprises a step of processing and eliminating at least a part of the outer periphery of the formed body or the fired body prior to the step of forming the outer wall part.

[Claim 11] The method of manufacturing a honeycomb structure according to claim 10, wherein the step of processing and eliminating the outer peripheral part is executed prior to the

step of firing the formed body.

[Claim12] Themethodofmanufacturingahoneycomb structure
according to claim 10, wherein the step of processing and
eliminating the outer peripheral part is executed after the step
5 of firing the formed body.

[Claim13] Themethodofmanufacturingahoneycomb structure
according to any one of claims 10 to 12, wherein a formed body
including an outer peripheral wall integrated with the partition
walls is obtained at the step of obtaining the formed body, and
10 the outer peripheral part including the outer peripheral wall
is processed and eliminated at the step of processing and
eliminating the outer peripheral part.

[Claim14] Themethodofmanufacturingahoneycomb structure
according to claim 9, wherein a formed body not including the
15 outer peripheral wall is obtained at the step of obtaining the
formed body, and the outer wall part is formed by disposing the
coating material on the outer peripheral surface of the formed
body or the fired body without processing and eliminating the
outer peripheral part of the formed body or the fired body.

20 [Claim15] Themethodofmanufacturingahoneycomb structure
according to any one of claims 9 to 14, wherein an organic material
is disposed on the outer peripheral surface of the formed body
or the fired body at the step of forming the outer wall part,
and voids are formed in at least a part between the outer peripheral
25 surface and the outer wall part by removing the organic material
after disposing the coating material on the organic material.

[Claim16] Themethodofmanufacturingahoneycomb structure

according to any one of claims 9 to 14, wherein there is used
a coating material whose viscosity is adjusted so as to form
voids in at least a part between the outer peripheral surface
and the outer wall part of the formed body or the fired body
5 at the step of forming the outer wall part.

[Claim17] Themethodofmanufacturingahoneycombstructure
accordingtoanyoneofclaims9to16, comprises a step of plugging
the edges of at least a part of cells prior to the step of firing
the formed body.

10 [Claim18] Themethodofmanufacturingahoneycombstructure
according to any one of claims 9 to 16, wherein a step of plugging
the edges of at least a part of cells after the step of firing
the formed body is included, and second firing is executed after
the plugging step.

15

20

25

[Name of Document] SPECIFICATION

[Title of the Invention] HONEYCOMB STRUCTURE AND METHOD OF
MANUFACTURING THE SAME

[Technical Field]

5 [0001]

The present invention relates to a honeycomb structure having a honeycomb structural part having a partition wall which forms cells each functioning as a fluid passage and an outer wall part so as to cover an outer peripheral part of the honeycomb structural part, and a method for manufacturing thereof.

[Background Art]

[0002]

To cope with the auto-emission control which is made stricter with each passing year, there is recently used a catalyst-carrying honeycomb structure to eliminate nitrogen oxides, sulfuroxides, hydrogenchlorides, hydrocarbons, carbon monoxide, and the like contained in auto exhaust gas. Further, the honeycomb structure is also used as a filter for capturing micro particles exhausted from diesel engines.

20 [0003]

For example, since a catalyst used in the catalyst-carrying honeycomb structure is ordinarily more activated in a high temperature region, a vehicle is driven in the state in which the catalyst is less activated during the period from the start of the vehicle to the time at which the temperature of the honeycomb structure is increased, thereby insufficiently purified gas is exhausted. Accordingly, the period of time during which the

vehicle is driven at a low temperature of the honeycomb structure must be shortened as much as possible. One of methods for this purpose is to increase the temperature of the honeycomb structure in a short time from the start of the vehicle by reducing the heat capacity of the honeycomb structure. To reduce the heat capacity of the honeycomb structure, the weight of the honeycomb structure must be reduced (the lowering of bulk density) without changing the geometrical surface area thereof, and there is a method of reducing the thickness of partition walls and increasing a porosity for this purpose. However, the mechanical strength of the honeycomb structure is reduced by reducing the bulk density thereof by reducing the wall thickness and increasing the porosity.

[0004]

Further, a honeycomb structure for purifying a large flow amount of gas exhausted from large vehicles such as trucks and the like must have a large volume, and further must have a large sectional area to reduce a pressure loss. However, when a honeycomb structure having a large sectional area is formed by extrusion, it has a problem in that the partition walls of cells cannot endure the weight of the honeycomb structure itself and are deformed in the outer periphery of the honeycomb structure (refer to patent document 1).

[0005]

To prevent the reduction of the mechanical strength, there is proposed a method of processing and eliminating the deformed portions of partition walls in the outer periphery of a honeycomb

structure after it is formed and fired and forming an outer shell layer constituting the outer surface of the honeycomb structure by filling the recessed grooves of the outer periphery with coating a ceramic cement,, and a honeycomb structure comprising the outer shell (refer to patent document 2). However, this method is disadvantageous in that the temperature increasing speed of the honeycomb structure is reduced at the start of operation because the heat capacity of the honeycomb structure is increased and thus it is difficult for the catalysts carried on the honeycomb structure to be activated in a short time, although the mechanical strength of the honeycomb structure can be enhanced. Further, there is also a problem in that the temperature of the central portion of the honeycomb structure is different from that of the outer periphery thereof. The occurrence of the temperature difference is not preferable because when the honeycomb structure is used as a catalyst carrier and a filter, catalyst activity and the regeneration of filter occurs unevenly, respectively. Further, the occurrence of the temperature difference is also not preferable in that it may cause cracks to be generated in the honeycomb structure.

[0006]

Further, there is a proposal for improving the accuracy of the outside diameter of a honeycomb structure which has partition walls and outer peripheral wall formed integrally by extrusion, by disposing a covering layer around the outer peripheral surface thereof (refer to patent document 3). The proposal discloses a method of suppressing the breakage of the

honeycomb structure caused by the reduction of mechanical strength thereof in canning due to the reduced partition wall thickness by reducing canning surface pressure by properly setting the range of clearance in the canning by improving the accuracy of the outside diameter of the honeycomb structure. Although the means for forming the covering layer around the outer peripheral surface of the honeycomb structure, which has the partition walls and the outer peripheral wall made integrally, can improve the canning resistant property of the honeycomb structure, a problem arises in that the heat capacity of an outer wall part is increased and the heat in the honeycomb structure escapes to the outside wall side thereof, the problem being the same as that occurring in the above-mentioned honeycomb structure whose outer periphery is coated with the ceramic cement.

[Patent document 1] JP-A-3-275309

[Patent document 2] JP-A-5-269388

[Patent document 3] JP-U-63-144836

[Disclosure of the Invention]

[Problems to be Solved by the Invention]

[0007]

An object of the present invention, which was made in view of the above problems, is to provide a honeycomb structure capable of suppressing the reduction of a temperature increasing speed of the honeycomb structure while suppressing the reduction of mechanical strength thereof and further capable of suppressing the occurrence of cracks and to provide a method of manufacturing

the honeycomb structure

[Means to solve the Problem]

[0008]

The present invention provides a honeycomb structure
5 including a honeycomb structural part, which has partition walls
for forming a plurality of cells partitioned in a honeycomb shape
and recesses on an outer peripheral surface, and an outer wall
part disposed on the outer peripheral surface of the honeycomb
structural part, wherein voids are formed in the recesses between
10 the outer wall part and the honeycomb structural part.

[0009]

In the present invention, it is preferable that the average
contact ratio of the outer wall part and the honeycomb structural
part in the recesses be 0.9 or less, further 0.7 or less, and
15 in particular 0.3 or less. It is preferable that the honeycomb
structural part and the outer wall part be composed of a ceramic
material and that an interface exists in the boundary between
the outer wall part and the honeycomb structural part. It is
preferable that the honeycomb structural part contain a material
20 having an absorption function and/or a catalyst function. It
is preferable that at least a part of the cells be plugged at
edges and used as a filter. It is preferable that catalysts
be carried in the cells and/or in the partition walls and that
the catalysts have a function for purifying auto exhaust gas.

25 [0010]

The present invention also provides a method of
manufacturing a honeycomb structure which includes a step of

obtaining a formed body by forming which has partition walls for forming a plurality of cells partitioned in a honeycomb shape, a step of drying the formed body, a step of obtaining a fired body by firing the formed body, and a step of forming an outer wall part by disposing a coating material on the outer peripheral surface of the formed body or the fired body, wherein the coating material is disposed so as to form voids in at least a part between the outer peripheral surface and the outer wall part at the step of forming the outer wall part.

10 [0011]

In the present invention, it is preferable to include a step of processing and eliminating at least a part of the outer periphery of the formed body or the fired body prior to the step of forming the outer wall part, and it is more preferable that the step of processing and eliminating the outer peripheral part be executed prior to the step of firing the formed body or that the step of processing and eliminating the outer peripheral part be executed after the step of firing the formed body. It is preferable that a formed body including an outer peripheral wall integrated with the partition walls be obtained at the step of obtaining the formed body and that the outer peripheral part including the outer peripheral wall be processed and eliminated at the step of processing and eliminating the outer peripheral part. It is also preferable that a formed body not including the outer peripheral wall be obtained at the step of obtaining the formed body and that the outer peripheral part be formed by disposing the coating material on the outer peripheral surface

of the formed body or the fired body without processing and eliminating the outer peripheral part of the formed body or the fired body. It is preferable that an organic material be disposed on the outer peripheral surface of the formed body or the fired body at the step of forming the outer peripheral wall and that voids be formed in at least a part between the outer peripheral surface and the outer peripheral part by removing the organic material after disposing the coating material on the organic material, and it is also preferable to use a coating material whose viscosity is adjusted so as to form voids in at least a part between the outer peripheral surface and the outer peripheral part of the formed body or the fired body at the step of forming the outer wall part. Further, it is preferable to include a step of plugging the edges of at least a part of cells prior to the step of firing the formed body, and it is also preferable to include a step of plugging the edges of at least a part of cells after the step of firing the formed body and to execute second firing after the plugging step.

[Effect of the Invention]

[0012]

According to the honeycomb structure of the present invention, the provision of the outer wall part can suppress a decrease in the temperature increasing speed of the honeycomb structure which is a drawback caused by providing the outer wall part while suppressing a decrease in the mechanical strength of the honeycomb structure, thereby the occurrence of cracks can be suppressed. The above-described honeycomb structure can

be easily produced by a process for production of the honeycomb structure of the present invention.

[Best Mode for Carrying Out the Invention]

[0013]

5 Although examples of the present invention will be described in detail with reference to the drawings, the present invention is by no means limited thereto. Note that, in the following description, a section means a section vertical to the path direction of cells (lengthwise direction) unless otherwise
10 specified.

[0014]

FIG. 1(a) is a schematic perspective view showing one example of a honeycomb structure of the present invention, and FIG. 1(b) is a partially enlarged view of the portion Ib of FIG.

15 1(a). Fig. 2(a) is a schematic plan view showing an example of a honeycomb structural part according to the present invention, and Fig. 2(b) is a partially enlarged view of a portion IIb of Fig. 2(a). A honeycomb structure 1 shown in Figs. 1(a) and (b) includes the honeycomb structural part 4 and an outer wall part
20 5. The honeycomb structural part 4 includes partition walls 2 as shown in Figs. 2(a) and (b). The partition walls 2 form a plurality of cells 3 partitioned in a honeycomb shape as well as form recesses 6 extending in the lengthwise direction of the cells 3 in a groove shape on the outer periphery thereof. In
25 the honeycomb structure 1 shown in FIGS. 1(a) and (b), voids 7 are formed between the outer wall part 5 and the honeycomb structural part 4 in the recesses 6.

[0015]

Figs. 7 (a) and (b) show a conventional honeycomb structure in which an outer wall part 5 has a large heat capacity and is in contact with a honeycomb structural part 4 in a large area.

5 Accordingly, when it is intended to use the honeycomb structure to treat auto exhaust gas and to heat and increase the temperature of the honeycomb structural part 4 by the heat of the exhaust gas, the heat of the honeycomb structural part 4 is liable to escape to the outer wall part 5. Accordingly, the temperature

10 increasing speed of the honeycomb structure is reduced as well as a temperature difference occurs in that the central portion of the honeycomb structure has a high temperature and the outer periphery thereof has a low temperature. As a result, the amount of thermal expansion of the outer wall part 5 is relatively smaller

15 than that of the honeycomb structural part 4. Further, in the conventional honeycomb structure, since the outer wall part 5 is in intimate contact with the honeycomb structural part 4 through the entire boundaries thereof, stress is caused by the difference between the thermal expansions of the honeycomb

20 structural part 4 and that of the outer wall part 5 as the temperature of the honeycomb structural part 4 increases. As a result, cracks are liable to be generated on the surface of the outer wall part 5 in a peripheral direction or in the path direction of cells. Further, when a crack 8 as shown in Fig.

25 8 (a) is generated on the outer wall part 5, the force for opening the crack 8 also propagates to the honeycomb structural part, and thus the crack 8 is also liable to propagate to the partition

walls 2 of the honeycomb structural part, as is shown in Fig. 8(b).

[0016]

In contrast, in the honeycomb structure 1 shown in Figs. 1(a) and (b), since the voids 7 are formed in the recess 6, the volume of the outer wall part 5 is reduced so that the heat capacity thereof is reduced as well as the area of the outer wall part 5 in contact with the honeycomb structural part 4 is reduced and the voids 7 act as a heat insulation layer. Therefore, the heat of the honeycomb structural part 4 is unlikely to escape to the outer wall part 5. As a result, even if the honeycomb structure includes the outer wall part 5, the reduction of the temperature increasing speed is suppressed as well as the temperature difference between a central portion and a peripheral portion is reduced. Thus, the difference between the amounts of thermal expansion of the outer wall part 5 and that of the honeycomb structural part 4 is reduced, which can suppress the cracks generated to the outer wall part 5 by the difference between the thermal expansions. Further, even if a crack 8 as shown in Fig. 3(a) is generated to the outer wall part 5, the propagation of the crack 8 from the outer wall part 5 to the partition walls 2 of the honeycomb structural part can be suppressed by the existence of the voids 7 as shown in Fig. 3(b).

[0017]

The size of the voids 7 is not particularly limited and is preferably set to a size by which any of the effects as described above can be obtained even if only slightly. Further, as shown

in Figs. 1(b) and 4(a), it is also preferable to dispose the voids 7 such that corner parts 9 as the intersections of the partition walls 2 are not in intimate contact with the outer wall part 5. An effect of easing that the outer wall part 5 is restrained in the recess 6 can be obtained by disposing the voids 7 as described above. Further, there can be obtained an effect of suppressing that cracks are generated in the peripheral direction of the outer wall part by tensile stress in a cell path direction due to the difference between the thermal expansions of the outer wall part 5 and the honeycomb structural part in the cell path direction. Even if the voids 7 have a small size, there is an effect of suppressing the generation of the cracks by disposing the voids as described above. When the size of the voids 7 is shown by a contact ratio (C), an average contact ratio of about 0.95 is preferable because an effect of suppressing crack can be obtained thereby. However, it is more preferable to set the average contact ratio to 0.9 or less.

[0018]

As shown in Fig. 4(a), the contact ratio (C) means the ratio (Y/X) of the length (Y) of the portion of the outer wall part 5 in contact with the bottom part 6a of the recess 6 to the length (X) of the bottom part (6a). Note that since the bottom part of the recess also includes the part where the open area of the recess is narrowed, when the recess 6 is formed to have a V-shaped section, as shown in Fig. 4(b), the length (X) of the bottom part is the total length of the respective lengths X_1 , X_2 of the two bottom parts 6a₁, 6a₂, and the length (Y) is the total

of the respective lengths Y_1 , Y_2 of the portions of the outer wall part 5 in contact with the two bottom parts $6a_1$, $6a_2$. Accordingly, the contact ratio (C) is shown by $C = (Y_1 + Y_2) / (X_1 + X_2)$.

5 [0019]

Further, the average contact ratio is preferably 0.7 or less and more preferably 0.3 or less. Since a heat insulation effect is enhanced by reducing the average contact ratio as described above, even if the temperature of the honeycomb structural part is changed abruptly, heat is unlikely to conduct from the honeycomb structural part to the outer wall part. Accordingly, since the temperature of the honeycomb structural part is increased rapidly, when catalysts are carried by the honeycomb structure, the catalysts can be activated promptly.

10 As a result, as the average contact ratio is reduced, an HC (hydrocarbon) purification effect can be enhanced. Since this effect outstandingly appears particularly in a large honeycomb structure having a thin wall for purifying diesel exhaust gas, the present invention can be preferably applied to the large honeycomb structure having the thin wall. Further, as the average contact ratio is reduced, since the volume of a coating material filling the recesses between the partition walls is reduced, it is contemplated that the reduction of the heat capacity of the outer wall part affects prompt activation.

20 Accordingly, as shown in Figs. 3(a) and (b), even if the average contact ratio is set to 0, it is preferable to reduce the volume of the outer wall part in the recesses between the partition

25

walls and the thickness of the outer wall part as much as possible. Further, the propagation of the cracks generated in the outer wall part in the cell path direction to the honeycomb structural part can be suppressed by reducing the average contact ratio as described above, in particular, by setting it to about 0.3 or less.

[0020]

A ceramic material and a metal material can be preferably used as the main component of the honeycomb structural part, and a ceramic material can be preferably used as the main component of the outer wall part. The ceramic material includes at least one kind selected from cordierite, alumina, mullite, lithium-aluminum-silicate, aluminum titanate, titania, zirconia, silicon nitride, aluminum nitride, and silicon carbide and the composites thereof. Further, the honeycomb structural part may include materials such as activated carbon, silica gel, zeolite, and the like having an absorption function and/or a catalyst function. Further, it is also preferable to use the metal material as the main component of the honeycomb structural part. This is because the effect of the example that the temperature of the inner peripheral cells of the honeycomb structural part is increased in a short time without escaping heat outstandingly appears because the metal material has high thermal conductivity and a large amount of heat escapes to the outer wall part. It is preferable that the outer wall part contain ceramic fibers and amorphous oxide matrices existing therebetween (matrices formed of for example, colloidal silica

or colloidal alumina), in addition to the particles, for example, cordierite particles of the ceramic material described above. Further, the outer wall part may contain a highly heat resistant material such as SiC particles and the like to provide the outer peripheral wall with a heat resistant property. Moreover, the outer wall part may include materials such as activated carbon, silica gel, zeolite, and the like having an absorption function and/or a catalyst function. A cement material formed by combining various materials can be used as described above. The main component used here means a material constituting at least 80 mass% of the respective parts.

[0021]

In the honeycomb structure of the present invention, it is preferable that at least a part of the cells of the honeycomb structure are plugged in the ends thereof and that the honeycomb structure is used as a filter. Further, as shown in Fig. 5, when the cells are alternately plugged on both the ends 42 and 44 thereof so that they exhibit a checkered pattern, since the whole fluid passes through the partition walls of the cells, the honeycomb structure can be preferably used as the filter. When the honeycomb structure is used as the filter, although the partition walls of the honeycomb structural part must be composed of a porous material, the ceramic material described above can be preferably used to the partition walls. In particular, when the honeycomb structure is used to capture soot exhausted from a diesel engine, the honeycomb structure may be recycled by burning and eliminating the captured soot.

In this case, a problem arises in that the soot remains without being burnt because the filter is liable to be made to a relatively low temperature in the outer periphery thereof, in particular, in the vicinity of the gas exhaust outlet thereof. Since the problem is also caused by the heat escaping to the outer wall part, the honeycomb structure of the present invention is effective to suppress the soot remaining without being burnt by the heat insulation effect of the voids of the honeycomb structure of the present invention. Accordingly, the honeycomb structure of the present invention is preferably used as the filter.

[0022]

In the honeycomb structure of the present invention, it is preferable that the catalysts be carried in the cells (surface of the partition walls) and/or on the inner surfaces of the fine pores. The honeycomb structure is preferably used to purify exhaust gas by adsorbing or absorbing exhaust gas components such as HC, NO_x, CO, and the like and/or solid components having carbon cores and the particulate matters such as SOF and like contained in the exhaust gas emitted from an internal combustion engine such as auto exhaust gas. When honeycomb structure of the present invention is used as described above, since a temperature increasing speed is particularly important to promptly activate the catalysts, the honeycomb structure of the present invention is more advantageous for this purpose. Precious metals such as Pt, Pd, Rh, and the like, alkali metals, alkali-earth metals, rare earths, and the like are exemplified

as preferable catalysts, and it is preferable to carry one kind or at least two kinds of them in the cells and/or in the partition walls. When a coating layer is formed by thinly coating alumina having a high specific surface area in, for example, the cells and/or in the partition walls in a thickness from several microns to several tens of microns and the above catalysts, for example, Pt particles and Pd particles are carried on the surfaces of the fine pores in the alumina, HC in the exhaust gas passing through the insides of the cells and/or the partition walls can be effectively oxidized.

[0023]

The sectional shape of the honeycomb structure of the present invention is not particularly limited, and it may be formed in an oval shape and an irregular shape in addition to a circular shape. Although the sectional area of the honeycomb structure is not particularly limited, since the present invention can be more suitably applied to the large honeycomb structure as described above, it is preferable that the honeycomb structure have a sectional area corresponding to a circle having a diameter of 100 mm or more and in particular 130 mm or more. The sectional shape of the cells is not particularly limited and may be any of a triangle, square, hexagon, circle, and the like. There is no particular restriction as to the thickness of the partition wall, and the thickness may be in a range of, for example, 30 to 2000 μm , preferably 40 to 1000 μm , more preferably 50 to 500 μm . In particular, since the present invention can be suitably applied to a honeycomb structure having

thin partition walls, a honeycomb structure having a partition wall thickness of 130 μm or less, in particular, 80 μm or less is a particularly suitable mode. The partition wall is preferably porous, and a porosity of, for example, 30 to 90% by volume. There is no particular restriction as to the cell density (the number of cells per unit sectional area). For example, the cell density can be in a range of 6 to 2000 cells/square inch (0.9 to 311 cells/ cm^2), preferably 50 to 1000 cells/square inch (7.8 to 155 cells/ cm^2), and further preferably 100 to 400 cells/square inch (15.5 to 62.0 cells/ cm^2).
[0024]

A manufacturing method for a honeycomb structure of the present invention is described in more detail below with reference to the concrete embodiments. In a specific example, first, a raw material is made to clay. That is, a main component, which is suitable for the honeycomb structural part, or a raw material, which is suitable to form the main component, for example, a cordierite-forming raw material which is made to cordierite by being fired or silicon carbide powder, metallic carbide powder, and the like for forming a silicon carbide-metallic silicon composite are added with binders, for example, methyl cellulose and hydroxy propoxyl methyl cellulose and further added with an interfacial active agent and water, and kneaded so that they are made to clay. The cordierite-forming raw material is obtained by preparing talk, kaoline, calcined kaoline, alumina, aluminium hydroxide, silica, and the like at a predetermined ratio so that a resultant chemical composition

is within the range of SiO_2 : 42 to 56 mass%, Al_2O_3 : 30 to 45 mass%,
MgO: 12 to 16 mass%.

[0025]

Next, a formed body including the partition walls for
5 forming a plurality of cells partitioned in a honeycomb shape
is obtained by forming the clay. Although a method of forming
the clay is not particularly limited, it is ordinarily preferable
to subject the clay to be formed by extrusion, and a plunger
type extruder, a twin screw type continuous extruder, and the
10 like are preferably used. When the twin screw type continuous
extruder is used, the mixing step to form clay and forming step
can continuously be carried out. At the time, although the clay
may be formed so as not to include an outer peripheral wall,
it is also preferable that the clay is formed to the formed body
15 including the outer peripheral wall integrated with the partition
walls from a view point of suppressing the deformation of the
partition walls.

[0026]

Next, the obtained formed body is dried, for example, by
20 microwaves, dielectric heating and/or hot air, and subsequently
fired by a firing step to obtain a fired body. A firing
temperature and atmosphere in the firing step can be changed
appropriately in accordance with the raw material for use, and
any person skilled in the art can select the firing temperature
25 and atmosphere optimum for the raw material for use. For example,
when the cordierite forming raw material is used, the formed
body is heated to degrease in the air, subsequently fired in

the air at a maximum temperature of about 1400 to 1450°C. When the silicon carbide powder and metal silicon powder are used as the raw material, the formed body can be heated to degrease in the air or an N₂ atmosphere, subsequently fired in an Ar atmosphere at about 1550 °C. A batch kiln or a continuous furnace such as a tunnel kiln is generally used in the firing, and the degreasing and firing can be carried out in the furnace at the same time or continuously.

[0027]

10 Next, at least a portion, preferably, the entire outer periphery of a fired body is processed and eliminated as necessary. Although this process is not essential, since the partition walls of the formed body may be deformed in the vicinity of the outer periphery prior to this process, it is preferable to eliminate
15 the partition walls in the vicinity thereof. Further, when a formed body including an outer peripheral wall integrated with partition walls is obtained in the process for obtaining the formed body, the outer peripheral wall must be eliminated. It is preferable also in this case to eliminate the outer peripheral
20 wall together with the partition walls in the vicinity of the outer peripheral wall. Further, the process for eliminating at least a portion of the outer periphery may be executed to the formed body before it is fired. As a range in which the outer periphery is eliminated, the outer periphery of the formed
25 body or the fired body is preferably processed and eliminated so as to preferably eliminate, for example, at least two cells from the outer periphery and to more preferably eliminate, for

example, two to four cells therefrom. When the cells are eliminated, a coating material can be easily disposed so as to form voids in the recesses 6 in a coating material disposing process, which will be described later, by processing and eliminating the cells so that the groove-shaped recesses 6 extending in the cell path direction are formed on the outer peripheral surface of the formed body or the fired body as shown in Figs. 2 (a) and (b). Note that the outer periphery eliminating process may not be necessary in the process for obtaining a formed body by obtaining the formed body formed in a shape having no outer peripheral wall as shown in Figs. 2 (a) and (b). Accordingly, it is also preferable to obtain a formed body which includes no outer peripheral wall and to execute an outer wall part forming process to be described later without processing and eliminating an outer wall part.

[0028]

Next, the outer wall part is formed by disposing the coating material around the outer periphery of the fired body. At the time, the coating material is disposed such that the voids are formed between at least a portion of the outer peripheral surface of the fired body and the outer wall thereof. At the time, the voids 7 having a shape as shown in Fig. 1 (b) can be easily formed by the recesses 6 existing on the outer peripheral surface of the fired body as shown in Figs. 2 (a) and (b). The formed body may be subjected to an outer peripheral wall forming process before a process for firing it. In this case, an outer periphery processing and eliminating process, which is executed as

necessary, is applied to the formed body before the coating material is disposed thereto because the above process must be executed in a process before the coating material is disposed.
[0029]

5 The coating material preferably contains at least one kind selected from the materials exemplified above as the ceramic materials suitable for the main component of the outer wall described above and more preferably contains the same kind of ceramic particles as those of the main component of the honeycomb
10 structural part. Exemplified as specific examples of the ceramic particles are, for example, cordierite, alumina, mullite, lithium-aluminum-silicate, aluminum titanate, titania, zirconia, silicon nitride, aluminum nitride, silicon carbide, and the like. The coating material preferably contains
15 colloidal silica and/or colloidal alumina in addition to the ceramic particles, further preferably contains the ceramic fiber, still further preferably contains the inorganic binder, and still further preferably contains an organic binder. Preferably, liquid components such as water are added to such raw materials
20 to obtain slurry, and the slurry is applied as the coating material.

[0030]

At the time, as a mode in which the formed body or the fired body has the recesses around the outer periphery thereof, the
25 voids 7 can be suitably formed by adjusting the viscosity of a slurry as the coating material so that the voids are formed in the recesses 6, that is, the slurry is not in contact with

the entire bottom parts 6a of the recesses, in particular, with the corner parts 9 as shown in Fig. 4(b).

[0031]

When the coating material is disposed to the fired body, it is preferable to heat and dry the coating material after it is disposed because the outer peripheral wall can be formed by evaporating a liquid component promptly. For example, when the coating material is dried at a temperature of 80°C or more, the strength of the outer peripheral wall can be increased. Note that a method of disposing the coating material is not particularly limited, and a thermal spray method and the like can be also used in addition to a conventionally used coating method.

[0032]

The voids can be also suitably formed by disposing an organic material 10 on the outer peripheral surface of the formed body or the fired body, in particular, on the outer peripheral surface in the recesses 6 as shown in, for example, Fig. 6(a) before the coating material is disposed in the process for forming the outer peripheral wall and eliminating the organic material 10 after the coating material 11 is disposed on the organic material 10 as shown in Fig. 6(b). Although a method of eliminating the organic material is not particularly limited, a preferable method is to eliminate the organic material by heating so as to liquefy, vaporize, decompose and/or burn it. Otherwise, the organic material may be eliminated by being dissolved by a solvent and the like. It is preferable that the organic material is not

fluidized at a room temperature and is fluidized at a relatively low temperature, for example, at 45 °C or more. Specifically exemplified as the organic material are fatty acids such as paraffin wax, wax, stearic acid, and the like, acid amides such as stearic acid amide and the like, and esters such as butyl stearete and the like. Further, an organic material which scatters and disappears at a higher temperature, for example, at about 300 to 400°C can be also suitably used, and polymer materials such as plastics and the like which are decomposed and disappear at the temperature can be also suitably used.
[0033]

The honeycomb structure formed as described above is different from an ordinary honeycomb structure, that is, a honeycomb structure having partition walls and an outer peripheral wall which are integrally formed by being integrally fired by extrusion and dried and formed. In the honeycomb structure of the present invention, when a firing body is not fired after the coating material is disposed on the outer peripheral surface thereof, a physical interface can exist in the boundary between the honeycomb structural part and the outer wall part. Further, even if the firing body is fired after the coating material is disposed on the outer peripheral surface thereof, the interface can exist between the honeycomb structural part and the outer wall part when the materials of both the parts are different from each other. Even if the materials of both the parts are the same, when both of the materials are cordierite, the interface exists between the honeycomb structural part and

the outer wall part because the orientation of the honeycomb structural part formed by being formed by extrusion is different from that of the outer peripheral wall formed by disposition. Even if both the materials are the same material other than cordierite, there can ordinarily exist a systematic interface due to the difference of fine pores and crystal particles resulting from a slightly different composition and a different forming process and a chemical interface due to a different distribution of elements, and the like. In contrast, these interfaces do not exist in the ordinary honeycomb structure because it is formed of the same material by the same forming process. Accordingly, although it is difficult to strictly distinguish the outer wall part from the honeycomb structural part in the ordinary honeycomb structure, it is possible to distinguish them from each other in the honeycomb structure formed by the manufacturing method described above.

[0034]

In the manufacturing method of the honeycomb structure of the present invention, it is also preferable to include a step of bonding a plurality of formed or fired bodies, preferably fired bodies. When this step is included, the formed honeycomb structure is constituted by bonding a plurality of segments which are segmented honeycomb structure, and the resistance to thermal shock is enhanced. There is no particular restriction as to a bonding material for use in the bonding step and, for example, a material similar to the coating material can be used. Although it is preferable to execute the process before the outer wall

forming process, when a manufacturing method has a process for eliminating an arbitrary outer periphery, the above process is preferably executed before the process. That is, after bonding a plurality of formed or fired bodies in a predetermined size
5 by the bonding step, the outer periphery is preferably removed to form the cell structural part which has a desired shape.
[0035]

When the honeycomb structure is used as the filter, in particular, as a DPF and the like, it is preferable to plug the
10 end faces of the openings of a part of the cells with a plug material. Further, as shown in Fig. 5, it is preferable to alternately plug the cells at both the edges 42 and 44 so that they exhibit the checkered pattern. Plugging can be conducted by masking cells that are not to be plugged, applying a
15 slurry-state plugging material to each open end face of segment, and drying and firing the resulting honeycomb structure. The plugging is preferably carried out after the forming step and before the firing step, so that the firing step may be performed only once. The plugging may also be carried out after the firing
20 or at any time after the forming. There is no particular restriction as to a plugging material, but the material similar to the raw material for forming can be used. Further, when the catalysts are carried by the honeycomb structure, the catalysts can be carried in the cells and/or in the partition walls by
25 washcoating a solution or a slurry containing the preferable catalysts described above and heating it.

[Examples]

[0036]

The present invention is described in more detail below by way of Examples. However, the present invention is not restricted to these Examples.

5 (Formation of Cell Structural Part)

After cordierite-forming raw materials, that is, talc, kaoline, alumina and other cordierite-forming raw material formed in fine particles were added with a forming aid, a pore making material, and water and prepared, they were mixed and
10 kneaded, and a resultant kneaded material (clay) was formed by extrusion, thereby a honeycomb-shaped formed body was made. Next, after a plug material was introduced to the predetermined openings of the open end faces of cells of the formed body and was dried, the ceramic honeycomb formed body was fired, thereby
15 a honeycomb-shaped fired body (ceramic honeycomb substrate) whose predetermined openings were plugged was obtained. Thereafter, the outer periphery of the fired body was eliminated by grinding process so that the outside diameter of the fired body was made smaller than a predetermined size. Thus, there
20 was obtained a honeycomb structural part (cell structure: partition wall thickness; 17 mil (about 430 μm), cell density; 100 cpsi (about 15.5 cells/cm²), cell pith; 2.5 mm) which was composed of partition walls by which a plurality of cells were formed as well as groove-like recesses were formed so as to extend
25 in a cell path direction on the outer peripheral surface of the fired body.

[0037]

(Examples 1 to 4 and Comparative Example 1)

Five kinds of coating materials each having a blend ratio and viscosity shown Table 1 were prepared, coated around the outer peripheries of honeycomb structural parts, and subjected to a heat treatment under conditions shown in Table 2, thereby honeycomb structures (diameter 267 mm × length 178 mm, outer wall thickness 0.8 mm) of examples 1 to 4 and comparative example 1) were obtained.

[0038]

10 [Table 1]

| COMPONENT | BLEND RATIO OF COATING MATERIAL (MASS PART) | | | | |
|----------------------------|---|------|------|------|------|
| | 1 | 2 | 3 | 4 | 5 |
| CORDIERITE POWDER | 55.0 | 60.0 | 60.0 | 63.0 | 64.5 |
| COLLOIDAL SILICA | 17.0 | 18.0 | 18.0 | 19.0 | 19.5 |
| CERAMIC FIBER | 3.2 | 3.2 | 3.2 | 3.2 | 3.2 |
| INORGANIC ADDITIVE | 0.6 | 0.6 | 0.6 | 0.6 | 0.6 |
| ORGANIC ADDITIVE | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 |
| WATER | 26.0 | 22.0 | 18.0 | 14.0 | 12.0 |
| [ABSOLUTE VISCOSITY mPa.s] | 80 | 110 | 150 | 200 | 280 |

[0039]

[Table 2]

| | COATING MATERIAL TO BE USED | COATING ORGANIC MATERIAL OF | HEAT TREATMENT TEMPERATURE |
|-----------------------|-----------------------------|-----------------------------|----------------------------|
| COMPARATIVE EXAMPLE 1 | 1 | NIL | 100°C |
| EXAMPLE 1 | 2 | NIL | 100°C |
| EXAMPLE 2 | 3 | NIL | 100°C |
| EXAMPLE 3 | 4 | NIL | 100°C |
| EXAMPLE 4 | 5 | NIL | 100°C |
| EXAMPLE 5 | 1 | PARAFFIN WAX | 400°C |
| EXAMPLE 6 | 1 | PARAFFIN WAX | 400°C |

Note: Paraffin wax PW-115 (melting point: 47°C) manufactured by Nihon Seiro Co. is used.

[0040]

(Examples 5 and 6)

Organic material layers were formed by thinly coating paraffin wax shown in Table 2 in the recesses of the outer peripheral surfaces of honeycomb structural parts before a coating material was coated and then the coating material shown in table 2 was coated on the paraffin wax. Thereafter, the coating material was subjected to a heat treatment under the conditions shown in Table 2 to obtain the honeycomb structures of Examples 5 and 6.

[0041]

(Measurement of Average Contact Ratio of Outer Wall Part and Honeycomb Structural Part)

Each two of the honeycomb structural parts of the examples 1 to 6 and the comparative example 1 were cut at right angles with respect to a cell path, and the cut surfaces thereof were polished. Thereafter, an average contact ratio was calculated by measuring and evaluating the contact ratios (C) at the bottoms of all the recesses of the outer peripheral parts on the cut surfaces. The results are shown in Table 3. As shown in Table 3, the average contact ratio of the honeycomb structures obtained in the examples 1 to 3, in which the ratio of water to the coating material is decreased while increasing the viscosity, was 0.21 to 0.75 as compared with that the average contact ratio of the honeycomb structure of the comparative example 1 was 1. Note that it was also confirmed that an increase in the viscosity of the coating material decreases the average contact ratio.

[0042]

Further, the average contact ratio of the honeycomb structures obtained in the examples 4 to 5, in which a paraffin wax layer was formed on the outer peripheral surface of the honeycomb structural part by thinly coating paraffin wax and then the coating material was coated and subjected to a heat treatment at 400°C and the paraffin wax layer was eliminated, was greatly reduced to 0.02 to 0.10. It is contemplated that the paraffin wax layer formed as described above was thermally decomposed and burned by the heat treatment executed at 400°C, thereby voids could be formed in the boundary between the honeycomb structural part and the coating material.

[0043]

[Table 3]

| | SAMPLE 1 | SAMPLE 2 |
|-----------------------|----------|----------|
| COMPARATIVE EXAMPLE 1 | 1 | 1 |
| EXAMPLE 1 | 0.96 | 0.85 |
| EXAMPLE 2 | 0.75 | 0.7 |
| EXAMPLE 3 | 0.5 | 0.47 |
| EXAMPLE 4 | 0.28 | 0.21 |
| EXAMPLE 5 | 0.1 | 0.05 |
| EXAMPLE 6 | 0.07 | 0.02 |

15 [0044]

(Evaluation of Honeycomb Structures)

An exhaust gas purification efficiency was measured and a 100-hour durability test was executed as to the respective samples shown in Table 3 using an actual diesel engine. It was confirmed that the occurrence of cracks on the outer wall parts in the peripheral direction thereof was more suppressed in the samples 1 and 2 of the example 1 than in the samples 1

and 2 of the comparative example 1. In the samples 1 and 2 of the example 1, the crack suppression effect of the sample 2 was larger than that of the sample 1, and the cracks of the sample 2 were smaller than those of the sample 1. The HC purification effect of the samples of the examples 2 and 3 was about 5% better than that of the samples of the comparative example. The HC purification effect of the samples of the examples 4, 5, and 6 was about 10% better than that of the samples of the comparative example 1. Further, in the samples of the comparative example 1 and the examples 1, 2, and 3, a phenomenon that cracks generated on the outer wall parts in the cell path direction propagated to the honeycomb structural parts was observed. However, the phenomenon was not observed in the samples of the examples 4, 5, and 6.

15 [0045]

(Examples 7 to 12 and Comparative Example 2)

Honeycomb structures were made using the same coating material as that of the examples 1 to 6 and the comparative example 1 under the same condition except that the cell structure of a cell structural part had a partition wall thickness of 5 mil (about 130 μm), a cell density of 300 cpsi (about 46.5 cells/cm²), and a cell pitch of 1.47 mm and that the size of the honeycomb structure was set to diameter 267 × length 178, and the same evaluation was executed. As a result, approximately the same effect as that described above was confirmed.

25 [0046]

(Examples 13 to 18 and Comparative Example 3)

Honeycomb structures were made using the same coating material as that of the examples 7 to 12 and the comparative example 2 under the same condition except that the cell structure of a cell structural part had a partition wall thickness of 4 mil (about 100 μm), a cell density of 300 cpsi (about 46.5 cells/ cm^2), and a cell pitch of 1.47 mm, and the same evaluation was executed. As a result, approximately the same effect as that described above was confirmed.

[0047]

10 (Examples 19 and Comparative Example 4)

Honeycomb structures were made using the same coating material as that of the example 5 and the comparative example 2 under the same condition except that the cell structure of a cell structural part had a partition wall thickness of 12 mil (about 300 μm), a cell density of 300 cpsi (about 46.5 cells/ cm^2), and a cell pitch of 1.47 mm.

[0048]

(Example 20 and Comparative Example 5)

Clay was prepared by adding 8 mass parts of methyl cellulose, 20 25 mass parts of water, and a small amount of an organic solvent to 100 mass parts of mixed powder as a raw material containing 70 mass% of silicon carbide powder having an average particle size of 12 μm and 30 mass% of silicon carbide powder having an average particle size of 0.5 μm and mixing and kneading them, 25 and formed bodies were obtained by extrusion forming the clay after the kneading process. The formed bodies were dried at 150°C, cell openings were alternately plugged in a checkered

pattern, and then the formed bodies were fired at 2200°C in an inert atmosphere after they were subjected to a binder elimination treatment, thereby fired bodies having a honeycomb structure were obtained. Thereafter, the outer peripheries of the fired bodies were eliminated likewise the embodiment 1, and honeycomb structural parts having a partition wall thickness of 12 mil (about 300 μm), a cell density of 300 cpsi (about 46.5 cells/ cm^2), and a cell pitch of 1.47 mm were obtained. Further, an outer wall part was made likewise the example 4, and silicon carbide honeycomb structures having diameter 144 mm \times length 203 mm were obtained (example 20). Honeycomb structures similar to those of the example 20 were obtained except that an outer wall part was made likewise the comparative example 1 (comparative example 5).

[0049]

(Soot Regeneration Test)

The honeycomb structures obtained in the examples 19 and 20 and the comparative examples 4 and 5 were attached to an exhaust pipe of a diesel engine, the diesel engine was operated, and about 30 g of soot was deposited on the honeycomb structures by flowing diesel exhaust gas (about 3 Nm^3/min) having a temperature of about 200 to 300°C into the honeycomb structures. Thereafter, a honeycomb structure regeneration test was executed by mounting the honeycomb structures on a gas burner generating no soot and forcibly burning the soot in the filters by flowing exhaust gas (about 1 Nm^3/min) having a temperature of about 600°C into the filters for 10 minutes. As a result, it was confirmed

that the soot remaining in the vicinities of outer peripheral parts without being burned was more suppressed in the honeycomb structures obtained in the examples 19 and 20 than those obtained in the comparative examples 4 and 5, and that the soot was burnt
5 uniformly as a whole.

[Industrial Applicability]

[0050]

As described above, since the honeycomb structure of the present invention is excellent in purification efficiency and
10 regeneration efficiency and can also suppress the occurrence of cracks, it can be widely used as a catalyst carrier, a filter, and the like for purifying exhaust gas. Further, the honeycomb structure manufacturing method of the present invention can be suitably used to manufacture the honeycomb structure described
15 above.

[Brief Description of the Drawings]

[0051]

Fig. 1(a) is a schematic perspective view showing an example of a honeycomb structure of the present invention.
20 Fig. 1(b) is a partial enlarged view showing a portion Ib in Fig. 1(a).

Fig. 2 (a) is a schematic plan view showing a honeycomb structural part according to the present invention.

Fig. 2(b) is a partial enlarged view showing a portion
25 IIb in Fig. 2(a).

Fig. 3(a) is a partially enlarged schematic sectional view showing a state in which cracks are generated in the example

of the honeycomb structure of the present invention.

Fig. 3(b) is a partially enlarged schematic sectional view showing a state in which cracks are generated in the example of the honeycomb structure of the present invention.

5 Fig. 4(a) is a partially enlarged schematic sectional view showing another example of a honeycomb structure of the present invention.

Fig. 4(b) is a partially enlarged schematic sectional view showing another example of a honeycomb structure of the present
10 invention.

Fig. 5 is a schematic perspective view showing another example of the honeycomb structure of the present invention.

Fig. 6(a) is a partially enlarged schematic sectional view showing
15 an example of a manufacturing method for a honeycomb structure of the present invention.

Fig. 6(b) is a partially enlarged schematic sectional view showing an example of a manufacturing method for a honeycomb structure of the present invention.

20 Fig. 7(a) is a schematic perspective view showing an example of a conventional honeycomb structure.

Fig. 7(b) is a partially enlarged view of a portion VIIb of Fig. 7(a).

Fig. 8(a) is a partially enlarged schematic sectional view
25 showing a state in which cracks are generated in a conventional honeycomb structure.

Fig. 8(b) is a partially enlarged schematic sectional view

showing a state in which cracks are generated in a conventional honeycomb structure.

[Description of reference numerals]

[0052]

- 5 1...honeycomb structure, 2...partition wall, 3...cell,
4...honeycomb structural part, 5...outer wall part, 6...recess, 6a,
6a₁, 6a₂...bottom of recess, 7...void, 8...crack, 9...corner part,
10...organic material, 11...coating material 42, 44...edge part

[Name of Document] ABSTRACT

[Abstract]

[Theme] There is provided a honeycomb structure capable of suppressing the reduction of a temperature increasing speed of the honeycomb structure while suppressing the reduction of mechanical strength thereof and further capable of suppressing the occurrence of cracks and to provide a method of manufacturing the honeycomb structure.

[Means] The present invention provides a honeycomb structure including a honeycomb structural part, which has partition walls 2 for forming a plurality of cells 3 partitioned in a honeycomb shape and recesses 6 on an outer peripheral surface, and an outer wall part 5 disposed on the outer peripheral surface of the honeycomb structural part, wherein voids are formed in the recesses 6 between the outer wall 5 part and the honeycomb structural part.

[Adopted Figure] Fig. 1 (b)

1

FIG. 1(a)

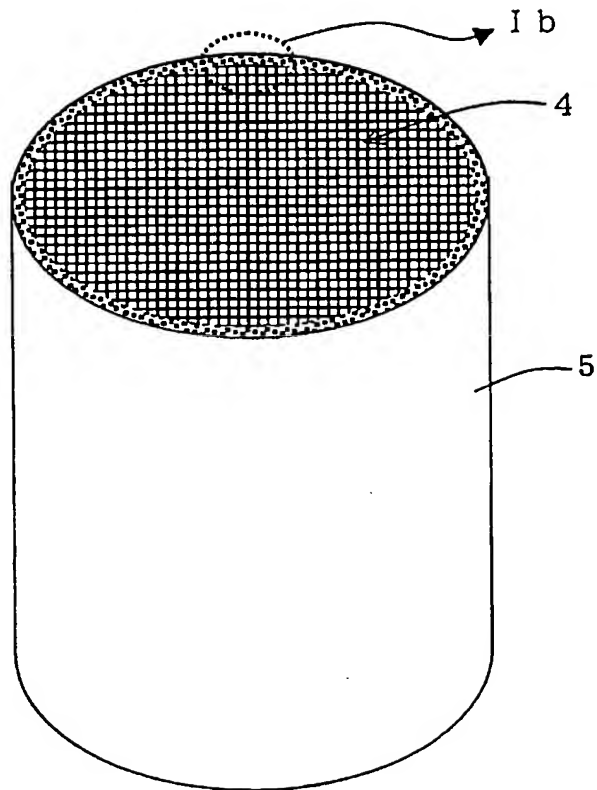


FIG. 1 (b)

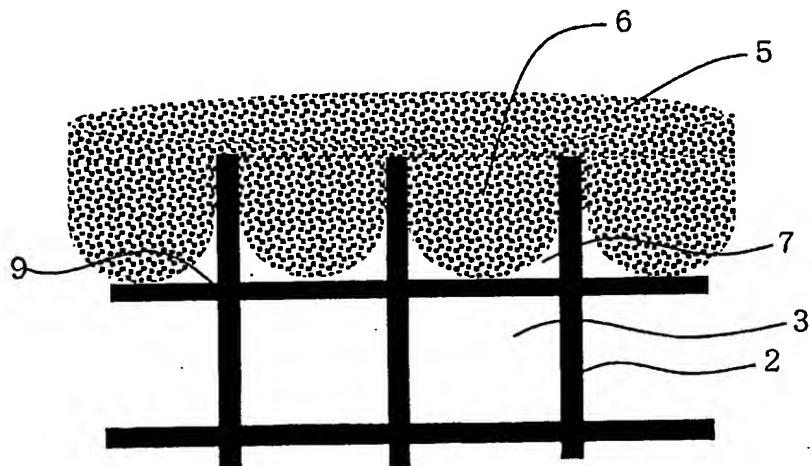


FIG. 2(a)

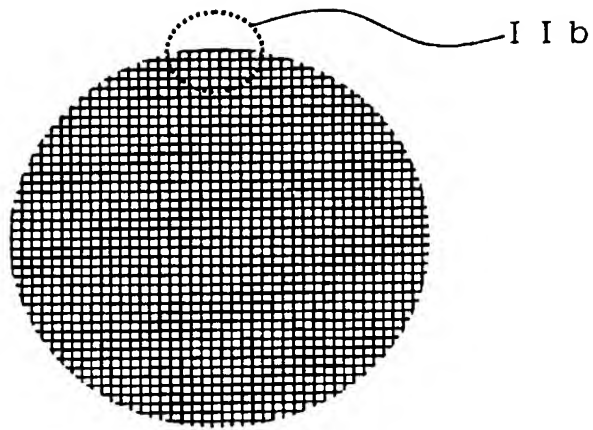
4

FIG. 2(b)

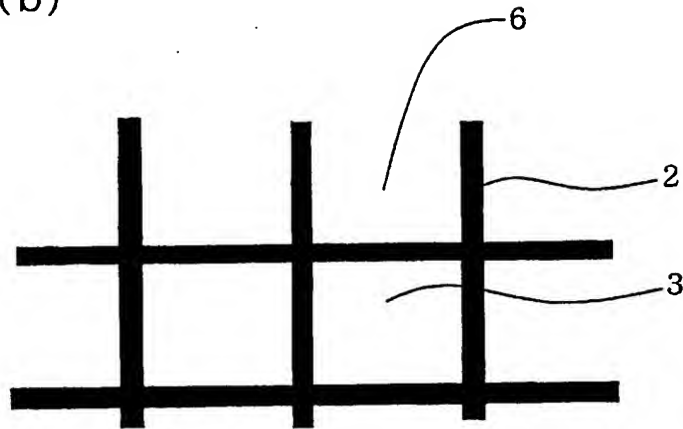


FIG. 3(a)

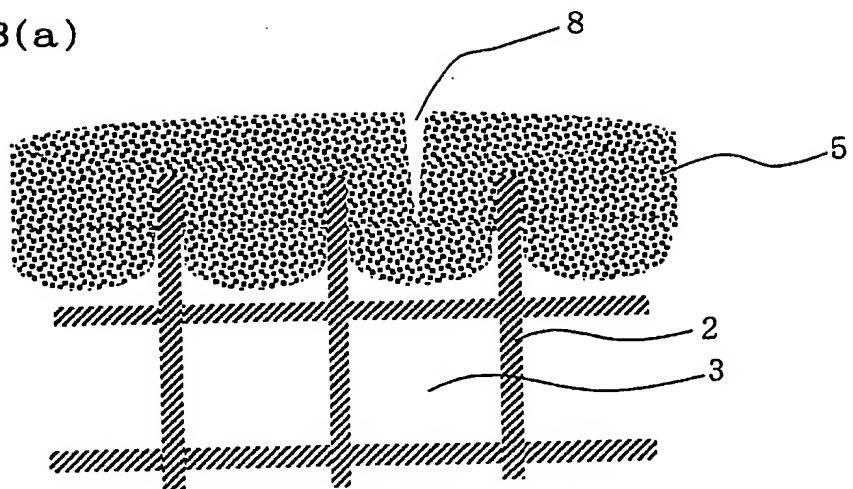


FIG. 3(b)

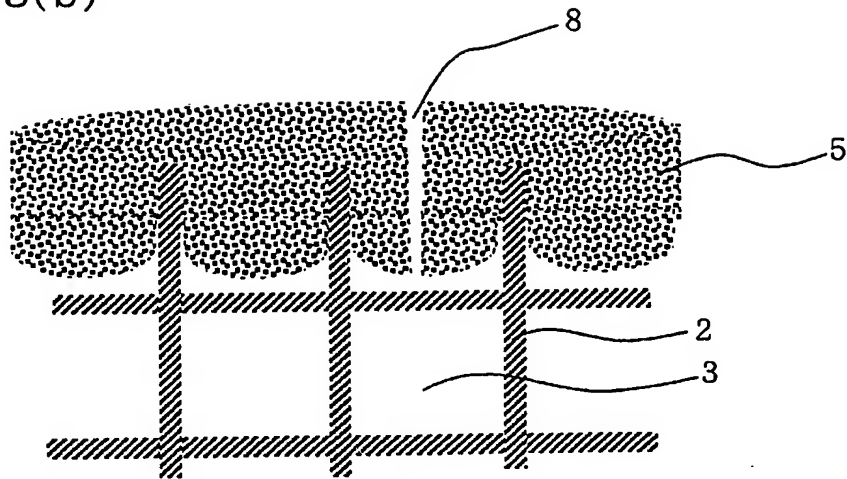


FIG. 4(a)

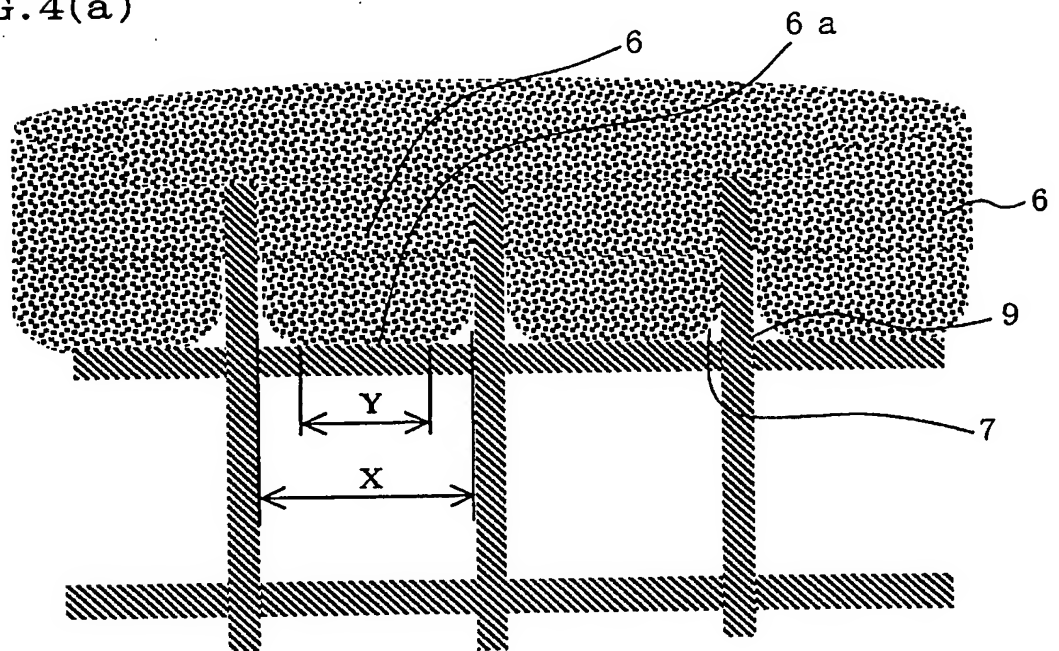


FIG. 4(b)

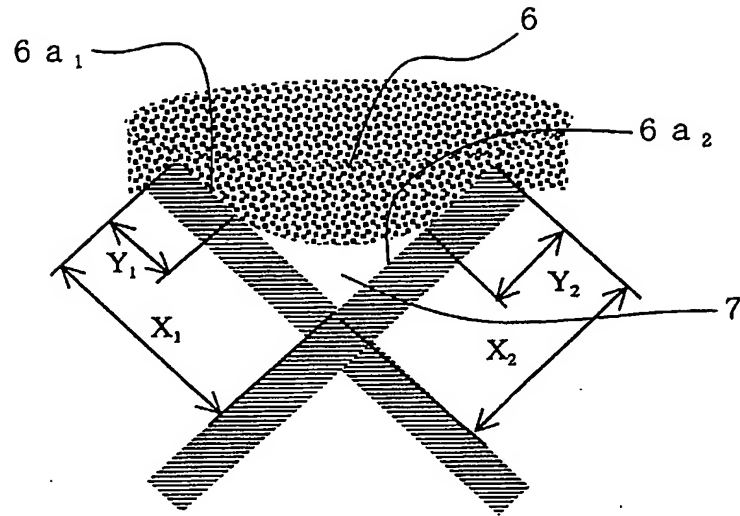


FIG. 5

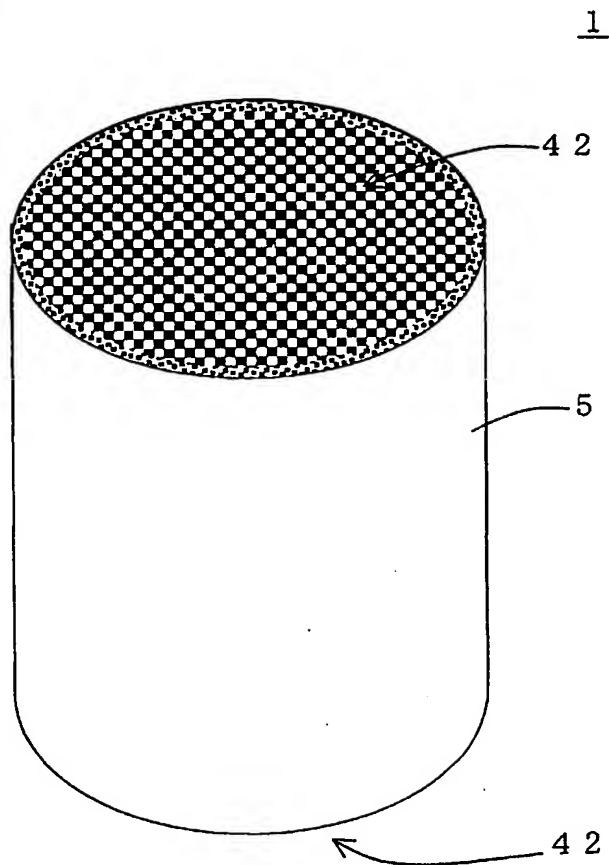


FIG. 6(a)

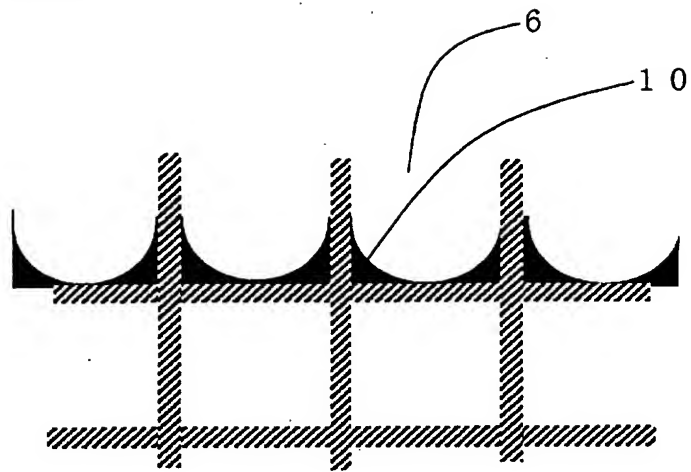


FIG. 6(b)

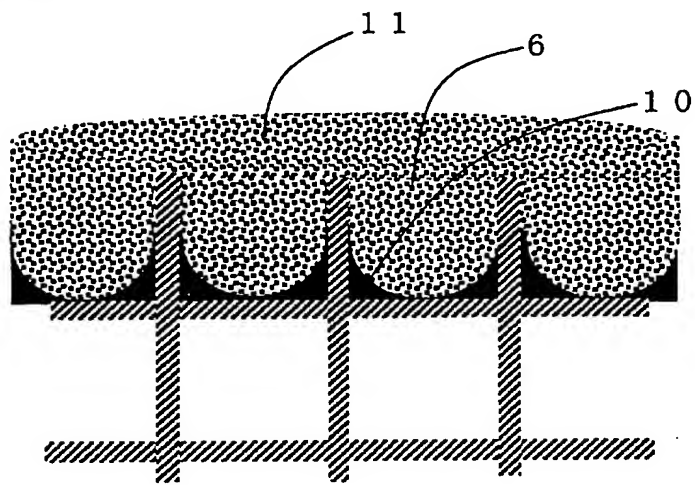


FIG. 7(a)

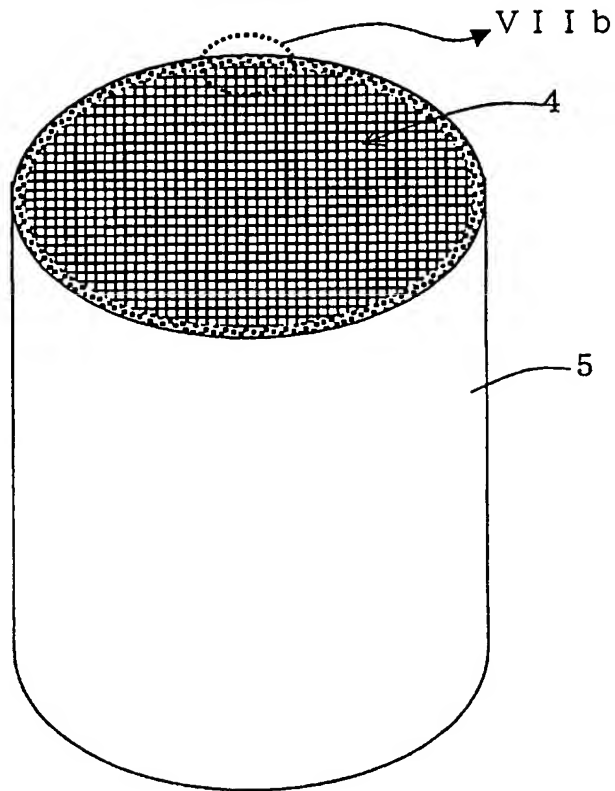
1

FIG. 7(b)

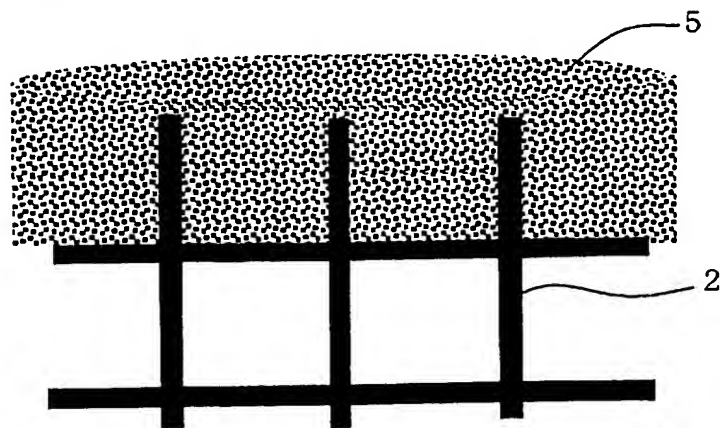


FIG. 8(a)

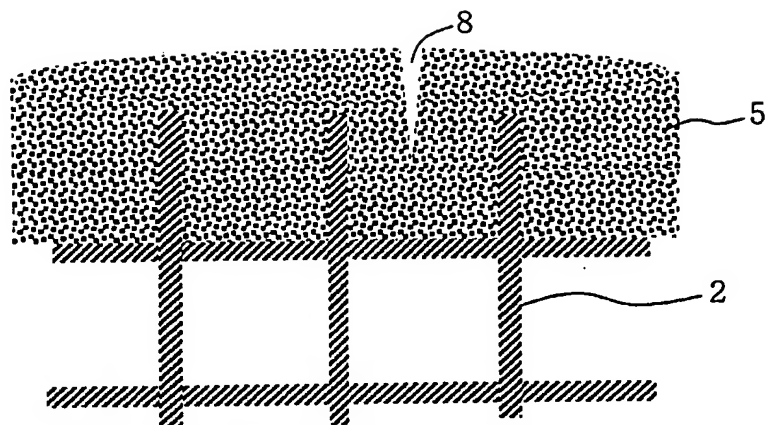


FIG. 8(b)

